


20120305\_16071503 C:\Documents and Settings\Ron PIM\Documents\My Dropbox\Public\RS-1 ISL.dwg

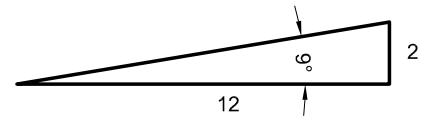

**INSTALLATION NOTE:**  
RECOMMENDED MINIMUM PITCH OF 2:12  
TO PREVENT POOLING WATER ON GLASS

1/16" EPDM CLOSED CELL  
BEDDING TAPE (CONT.)

RS-3 EXTRUDED ALUMINUM SILL  
CAP, MITERED AND WELDED AT  
CORNERS

#10 X 5/8" PAN HEAD  
SCREW AT 18" O.C.

1/4"Ø WEEP SLOTS  
(ONE PER SIDE AT  
CORNERS)

SHIM AS REQUIRED

RS-1 EXTRUDED  
ALUM. PERIMETER  
FRAME, MITERED  
AND WELDED AT  
CORNERS


#10 x 2" SCREW  
**NOTE:**  
SCREW TO CURB  
IN EACH HOLE  
PROVIDED

1/2"

**INSTALLATION NOTE:**  
\* SET SILL ON FOAM  
WEATHER TAPE OR  
NON-SETTING CAULK



**SILL**



**Royalite**  
MANUFACTURING, INC.

1055 TERMINAL WAY  
SAN CARLOS, CA 94070  
PHONE: (650) 637-1440  
FAX: (650) 637-9770