

Inside Curb Dimension Worksheet

Operable skylights only

Thank you for your order. Because your skylight is **operable**, we need the **finished inside curb dimensions** (sheetrock to sheetrock). **We can't release your order to production without them.** Please fill in the boxes below and send this page back, or reply with the two numbers.

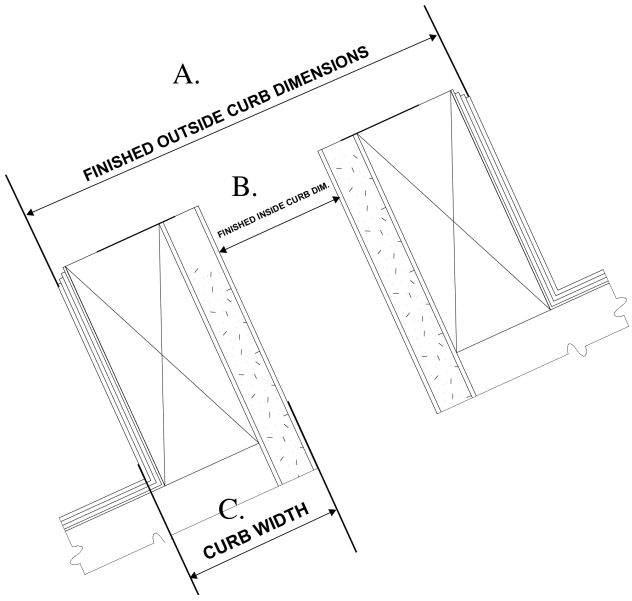

B = Finished inside curb dimension. Measure sheetrock to sheetrock, with drywall installed.



Why we need it

The operator mounts inside the light well, on the sheetrock. We use your inside and outside curb dimensions to find the curb width, which sets the operator's bracket offset.

> Minimum bracket offset is 2-1/4". Anything less means the curb must be built out with added drywall or furring.

Finished inside curb (B)

Length (in.) × Height (in.), in the slope direction