

1 Tell us about you and the job

This page

2 List each skylight

Page 2 — one line per size

3 Email it to us

Attach plans or photos if you have them

YOUR CONTACT INFO

Name	Company (if any)
Email	Phone
I am a...	

PROJECT

PO / Job name

Job address (street, city, ZIP)


WHAT WE OFFER — SINGLE LITE SKYLIGHTS

Glass	Insulated, tempered over laminated — Solarban 70 or Solarban 90 low-E
Glass tints	Clear, White, Solarbronze, Solar Gray, Optigray (tints add cost)
Acrylic	Double-dome — Clear/Clear, Bronze/Clear, White/Clear (no upcharge)
Frame finish	Mill (raw aluminum), Dark Bronze, Black, V-Gray, White, Silver — same price
Operation	Fixed · Manual (pole or crank) · Electric (wall switch) · Solar (remote)

Operators come factory-attached, so any contractor can install. A licensed electrician is recommended for electric units. Questions? Call (650) 637-1440.

HOW TO MEASURE

Give sizes in inches as Length × Height. Height is measured up the slope (head to sill). Tell us which point you measured from:

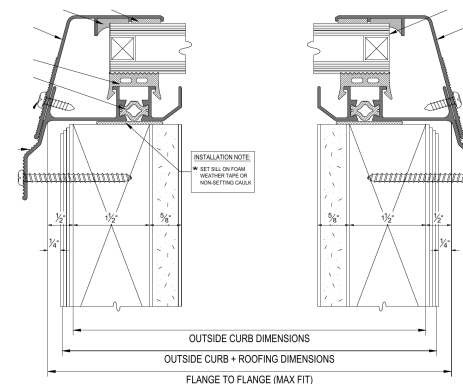

Outside curb

Raw curb, before roofing — new construction or remodel. We add 1/2" clearance.

Outside curb + roofing

Curb with roofing/flashing on — replacements. We add 1/4" clearance.


Flange to flange (max fit)

Largest frame the opening can take — no clearance added.


Operable skylights

(Manual, Electric or Solar): we also need the inside curb dimensions (L × H).


Curb conditions we build for (perpendicular curb only)



Sloped roof
Curb square to the roof



Plumb ceiling opening
Curb square to the roof,
plumb opening below



Flat roof
1:12 min – 2:12 max pitch

Steeper roofs need the curb framed perpendicular to the roof on site.



Skylight Schedule

One line per size — group identical skylights on one line with a quantity

Use the drop-downs to pick options. Not sure about something? Leave it blank and add a note — we'll follow up.

Mark	Qty	Length (in.)	Height (in.)	Measured from	Glazing	Color / tint	Operation	Hinge side	Frame finish	Inside curb L x H (operable only)

Note: Inside curb dimensions are required for operable skylights only (Manual, Electric or Solar). Hinge side also applies to operable skylights only.

Notes / special instructions